



**DPA**

**Draka Prestolite Automotive**

A Brand of Prysmian Group

# Automotive & Commercial Vehicle Power & Battery Cables



**Prysmian**  
Group

# Automotive & Commercial Vehicle Power & Battery Cables



Prysmian Group is a leader in material development, production technologies and logistics for the automotive industry. With a full portfolio of power & battery cables, **Draka Prestolite Automotive** is a leading name in materials development, production technologies and cable designs for the automotive sector. With Centers of Excellence located in Wuppertal, Germany and Paragould, Arkansas in the United States, together with a global network of manufacturing plants in Europe, Asia-Pacific, and the Americas, Prysmian Group's outstanding product portfolio covers all mechanical, electrical and chemical requirements in passenger cars, commercial vehicles, off-road vehicles and public transport vehicles.

Such varied requirements have in turn led to an outstanding portfolio of customized products, including everything from Low Voltage single and multi-core multimedia and instrumentation cables to power supply cables and High Voltage charging cables for electrical cars.

## **Draka Prestolite Automotive offers a full line of Vehicle Mounted Cable such as:**

- Up to 60V Mono, Power and Battery Cables
- High Voltage Mono, Power and Battery Cables - shielded and unshielded
- Multi-Core Cables for sensor applications such as Seat Belt Buckle, Wheel Speed and Drivetrain Sensors
- Data Cables including Ethernet, FlexRay and HSD
- Multi-Media Cables

## **Our portfolio of cables are designed, built and tested to withstand rugged conditions per the following specifications:**

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- GMW15626
- GMW15839
- Stellantis MS.90034/03
- Stellantis MS.90034/05
- Stellantis MS.90034/09
- ISO 19642-05
- ISO 19642-09
- JASO D609
- JASO D611
- SAE J1127
- SAE J1128
- SAE J1654
- SAE J2840

# Up to 60V Cables



# Product Information Sheet



## Battery Cable

- 125°C
- Thin Wall
- Standard Stranding
- Bare Copper Conductors

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPE
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Stellantis MS.90034/03
- GMW15626
- ISO 19642-03

### Applications

- Low tension cables for -40°C to 125°C
- Nominal system voltage up to 60 V DC
- Temperature Class 3: -40°C to 125°C

### Product Options

#### Colors:

- 12 Volt: Red or Black with or without stripes and others available upon request
- 24 Volt: Yellow
- 48 Volt: Blue

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	116	0.31	2.38	0.32	4.60	5.00
10	144	0.31	1.82	0.48	5.30	6.00
12	174	0.31	1.52	0.48	5.80	6.50
16	228	0.31	1.16	0.52	6.40	7.20
20	276	0.31	0.955	0.52	7.00	7.80
25	355	0.31	0.743	0.52	7.90	8.70
30	408	0.31	0.647	0.64	8.70	9.60
35	501	0.31	0.527	0.64	9.40	10.40
40	558	0.31	0.473	0.71	10.00	11.10
50	717	0.31	0.368	0.71	11.00	12.20
60	838	0.31	0.315	0.80	12.00	13.30
70	1019	0.31	0.259	0.80	13.00	14.40
85	1197	0.31	0.219	0.90	14.40	15.80
95	1347	0.31	0.196	0.90	15.30	16.70

Rev 0 (2022-05-20)

Written by: FClayton

Prestolite Wire Engineering  
Prysmian Group Automotive

Please note: Data subject to change without notice.  
Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 125°C
- Thin Wall
- Flexible Stranding
- Bare Copper Conductors

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPE
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Stellantis MS.90034/03
- GMW15626
- ISO 19642-03

### Applications

- Low tension cables for -40°C to 125°C
- Nominal system voltage up to 60 V DC
- Temperature Class 3: -40°C to 125°C

### Product Options

#### Colors:

- 12 Volt: Red or Black with or without stripes and others available upon request
- 24 Volt: Yellow
- 48 Volt: Blue

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	240	0.21	2.38	0.32	4.60	5.00
10	320	0.21	1.82	0.48	5.30	6.00
12	380	0.21	1.52	0.48	5.80	6.50
16	512	0.21	1.16	0.52	6.40	7.20
20	610	0.21	0.955	0.52	7.00	7.80
25	790	0.21	0.743	0.52	7.90	8.70
30	903	0.21	0.647	0.64	8.70	9.60
35	1102	0.21	0.527	0.64	9.40	10.40
40	1235	0.21	0.473	0.71	10.00	11.10
50	1600	0.21	0.368	0.71	11.00	12.20
60	1841	0.21	0.315	0.80	12.00	13.30
70	2147	0.21	0.259	0.80	13.00	14.40
85	2660	0.21	0.219	0.90	14.40	15.80
95	3000	0.21	0.196	0.90	15.30	16.70

Rev 0 (2022-05-20)

Written by: FClayton

Prestolite Wire Engineering  
 Prysmian Group Automotive  
 Please note: Data subject to change without notice.  
 Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 125°C
- Thin Wall
- Standard Stranding
- Flexible Insulation with Bare Copper Conductors

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPO (EPDM)
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Stellantis MS.90034/03
- GMW15626
- ISO 19642-03

### Applications

- Low tension cables for -40°C to 125°C
- Nominal system voltage up to 60 V DC
- Temperature Class 3: -40°C to 125°C

### Product Options

#### Colors:

- 12 Volt: Red or Black with or without stripes and others available upon request
- 24 Volt: Yellow
- 48 Volt: Blue

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	116	0.31	2.38	0.32	4.60	5.00
10	144	0.31	1.82	0.48	5.30	6.00
12	174	0.31	1.52	0.48	5.80	6.50
16	228	0.31	1.16	0.52	6.40	7.20
20	276	0.31	0.955	0.52	7.00	7.80
25	355	0.31	0.743	0.52	7.90	8.70
30	408	0.31	0.647	0.64	8.70	9.60
35	501	0.31	0.527	0.64	9.40	10.40
40	558	0.31	0.473	0.71	10.00	11.10
50	717	0.31	0.368	0.71	11.00	12.20
60	838	0.31	0.315	0.80	12.00	13.30
70	1019	0.31	0.259	0.80	13.00	14.40
85	1197	0.31	0.219	0.90	14.40	15.80
95	1347	0.31	0.196	0.90	15.30	16.70

Rev 0 (2022-05-20)

Written by: FClayton

Prestolite Wire Engineering  
Prysmian Group Automotive

Please note: Data subject to change without notice.  
Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 125°C
- Thin Wall
- Flexible Stranding
- Flexible Insulation with Bare Copper Conductors

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPO (EPDM)
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Stellantis MS.90034/03
- GMW15626
- ISO 19642-03

### Applications

- Low tension cables for -40°C to 125°C
- Nominal system voltage up to 60 V DC
- Temperature Class 3: -40°C to 125°C

### Product Options

#### Colors:

- 12 Volt: Red or Black with or without stripes and others available upon request
- 24 Volt: Yellow
- 48 Volt: Blue

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	240	0.21	2.38	0.32	4.60	5.00
10	320	0.21	1.82	0.48	5.30	6.00
12	380	0.21	1.52	0.48	5.80	6.50
16	512	0.21	1.16	0.52	6.40	7.20
20	610	0.21	0.955	0.52	7.00	7.80
25	790	0.21	0.743	0.52	7.90	8.70
30	903	0.21	0.647	0.64	8.70	9.60
35	1102	0.21	0.527	0.64	9.40	10.40
40	1235	0.21	0.473	0.71	10.00	11.10
50	1600	0.21	0.368	0.71	11.00	12.20
60	1841	0.21	0.315	0.80	12.00	13.30
70	2147	0.21	0.259	0.80	13.00	14.40
85	2660	0.21	0.219	0.90	14.40	15.80
95	3000	0.21	0.196	0.90	15.30	16.70

Rev 0 (2022-05-20)

Written by: FClayton

Prestolite Wire Engineering  
 Prysmian Group Automotive  
 Please note: Data subject to change without notice.  
 Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 150°C
- Thin Wall
- Standard Stranding
- Flexible Insulation with Bare Copper Conductors

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPO (EPDM)
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Stellantis MS.90034/03
- GMW15626
- ISO 19642-03

### Applications

- Low tension cables for -40°C to 150°C
- Nominal system voltage up to 60 V DC
- Temperature Class 4: -40°C to 150°C

### Product Options

#### Colors:

- 12 Volt: Red or Black with or without stripes and others available upon request
- 24 Volt: Yellow
- 48 Volt: Blue

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	116	0.31	2.38	0.32	4.60	5.00
10	144	0.31	1.82	0.48	5.30	6.00
12	174	0.31	1.52	0.48	5.80	6.50
16	228	0.31	1.16	0.52	6.40	7.20
20	276	0.31	0.955	0.52	7.00	7.80
25	355	0.31	0.743	0.52	7.90	8.70
30	408	0.31	0.647	0.64	8.70	9.60
35	501	0.31	0.527	0.64	9.40	10.40
40	558	0.31	0.473	0.71	10.00	11.10
50	717	0.31	0.368	0.71	11.00	12.20
60	838	0.31	0.315	0.80	12.00	13.30
70	1019	0.31	0.259	0.80	13.00	14.40
85	1197	0.31	0.219	0.90	14.40	15.80
95	1347	0.31	0.196	0.90	15.30	16.70

Rev 0 (2022-05-20)

Written by: FClayton

Prestolite Wire Engineering  
Prysmian Group Automotive

Please note: Data subject to change without notice.  
Contact your Customer Service Representative for any updates.



# Product Information Sheet



## Battery Cable

- 150°C
- Thin Wall
- Flexible Stranding
- Flexible Insulation with Bare Copper Conductors

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPO (EPDM)
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Stellantis MS.90034/03
- GMW15626
- ISO 19642-03

### Applications

- Low tension cables for -40°C to 150°C
- Nominal system voltage up to 60 V DC
- Temperature Class 4: -40°C to 150°C

### Product Options

#### Colors:

- 12 Volt: Red or Black with or without stripes and others available upon request
- 24 Volt: Yellow
- 48 Volt: Blue

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	240	0.31	2.38	0.32	4.60	5.00
10	320	0.31	1.82	0.48	5.30	6.00
12	380	0.31	1.52	0.48	5.80	6.50
16	512	0.31	1.16	0.52	6.40	7.20
20	610	0.31	0.955	0.52	7.00	7.80
25	790	0.31	0.743	0.52	7.90	8.70
30	903	0.31	0.647	0.64	8.70	9.60
35	1102	0.31	0.527	0.64	9.40	10.40
40	1235	0.31	0.473	0.71	10.00	11.10
50	1600	0.31	0.368	0.71	11.00	12.20
60	1841	0.31	0.315	0.80	12.00	13.30
70	2147	0.31	0.259	0.80	13.00	14.40
85	2660	0.31	0.219	0.90	14.40	15.80
95	3000	0.31	0.196	0.90	15.30	16.70

Rev 0 (2022-05-20)

Written by: FClayton

Prestolite Wire Engineering  
 Prysmian Group Automotive  
 Please note: Data subject to change without notice.  
 Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 200°C
- Thin Wall
- Standard Stranding
- Flexible Insulation with Bare Copper Conductors

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: Silicone
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Stellantis MS.90034/03
- GMW15626
- ISO 19642-03

### Applications

- Low tension cables for -40°C to 200°C
- Nominal system voltage up to 60 V DC
- Temperature Class 4: -40°C to 200°C

### Product Options

#### Colors:

- 12 Volt: Red or Black with or without stripes and others available upon request
- 24 Volt: Yellow
- 48 Volt: Blue

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	116	0.31	2.38	0.32	4.60	5.00
10	144	0.31	1.82	0.48	5.30	6.00
12	174	0.31	1.52	0.48	5.80	6.50
16	228	0.31	1.16	0.52	6.40	7.20
20	276	0.31	0.955	0.52	7.00	7.80
25	355	0.31	0.743	0.52	7.90	8.70
30	408	0.31	0.647	0.64	8.70	9.60
35	501	0.31	0.527	0.64	9.40	10.40
40	558	0.31	0.473	0.71	10.00	11.10
50	717	0.31	0.368	0.71	11.00	12.20
60	838	0.31	0.315	0.80	12.00	13.30
70	1019	0.31	0.259	0.80	13.00	14.40
85	1197	0.31	0.219	0.90	14.40	15.80
95	1347	0.31	0.196	0.90	15.30	16.70

Rev 0 (2022-05-20)

Written by: FClayton

Prestolite Wire Engineering  
Prysmian Group Automotive

Please note: Data subject to change without notice.  
Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 200°C
- Thin Wall
- Standard Stranding
- Flexible Insulation with Bare Copper Conductors

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLFE
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Stellantis MS.90034/03
- GMW15626
- ISO 19642-03

### Applications

- Low tension cables for -40°C to 200°C
- Nominal system voltage up to 60 V DC
- Temperature Class 6: -40°C to 200°C

### Product Options

#### Colors:

- 12 Volt: Red or Black with or without stripes and others available upon request
- 24 Volt: Yellow
- 48 Volt: Blue

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	116	0.31	2.38	0.32	4.60	5.00
10	144	0.31	1.82	0.48	5.30	6.00
12	174	0.31	1.52	0.48	5.80	6.50
16	228	0.31	1.16	0.52	6.40	7.20
20	276	0.31	0.955	0.52	7.00	7.80
25	355	0.31	0.743	0.52	7.90	8.70
30	408	0.31	0.647	0.64	8.70	9.60
35	501	0.31	0.527	0.64	9.40	10.40
40	558	0.31	0.473	0.71	10.00	11.10
50	717	0.31	0.368	0.71	11.00	12.20
60	838	0.31	0.315	0.80	12.00	13.30
70	1019	0.31	0.259	0.80	13.00	14.40
85	1197	0.31	0.219	0.90	14.40	15.80
95	1347	0.31	0.196	0.90	15.30	16.70

Rev 0 (2022-05-20)

Written by: FClayton

Prestolite Wire Engineering  
 Prysmian Group Automotive  
 Please note: Data subject to change without notice.  
 Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 200°C
- Thin Wall
- Flexible Stranding
- Flexible Insulation with Bare Copper Conductors

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: Silicone
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Stellantis MS.90034/03
- GMW15626
- ISO 19642-03

### Applications

- Low tension cables for -40°C to 200°C
- Nominal system voltage up to 60 V DC
- Temperature Class 6: -40°C to 200°C

### Product Options

#### Colors:

- 12 Volt: Red or Black with or without stripes and others available upon request
- 24 Volt: Yellow
- 48 Volt: Blue

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	240	0.21	2.38	0.32	4.60	5.00
10	320	0.21	1.82	0.48	5.30	6.00
12	380	0.21	1.52	0.48	5.80	6.50
16	512	0.21	1.16	0.52	6.40	7.20
20	610	0.21	0.955	0.52	7.00	7.80
25	790	0.21	0.743	0.52	7.90	8.70
30	903	0.21	0.647	0.64	8.70	9.60
35	1102	0.21	0.527	0.64	9.40	10.40
40	1235	0.21	0.473	0.71	10.00	11.10
50	1600	0.21	0.368	0.71	11.00	12.20
60	1841	0.21	0.315	0.80	12.00	13.30
70	2147	0.21	0.259	0.80	13.00	14.40
85	2660	0.21	0.219	0.90	14.40	15.80
95	3000	0.21	0.196	0.90	15.30	16.70

Rev 0 (2022-05-20)

Written by: FClayton

Prestolite Wire Engineering  
Prysmian Group Automotive

Please note: Data subject to change without notice.  
Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 200°C
- Thin Wall
- Flexible Stranding
- Flexible Insulation with Bare Copper Conductors

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLFE
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Stellantis MS.90034/03
- GMW15626
- ISO 19642-03

### Applications

- Low tension cables for -40°C to 200°C
- Nominal system voltage up to 60 V DC
- Temperature Class 6: -40°C to 200°C

### Product Options

#### Colors:

- 12 Volt: Red or Black with or without stripes and others available upon request
- 24 Volt: Yellow
- 48 Volt: Blue

#### Packaging Options:

- Reels, various sizes and disposal or recyclable


Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	240	0.21	2.38	0.32	4.60	5.00
10	320	0.21	1.82	0.48	5.30	6.00
12	380	0.21	1.52	0.48	5.80	6.50
16	512	0.21	1.16	0.52	6.40	7.20
20	610	0.21	0.955	0.52	7.00	7.80
25	790	0.21	0.743	0.52	7.90	8.70
30	903	0.21	0.647	0.64	8.70	9.60
35	1102	0.21	0.527	0.64	9.40	10.40
40	1235	0.21	0.473	0.71	10.00	11.10
50	1600	0.21	0.368	0.71	11.00	12.20
60	1841	0.21	0.315	0.80	12.00	13.30
70	2147	0.21	0.259	0.80	13.00	14.40
85	2660	0.21	0.219	0.90	14.40	15.80
95	3000	0.21	0.196	0.90	15.30	16.70

Rev 0 (2022-05-20)

Written by: FClayton

Prestolite Wire Engineering  
 Prysmian Group Automotive  
 Please note: Data subject to change without notice.  
 Contact your Customer Service Representative for any updates.

# High Voltage Cables

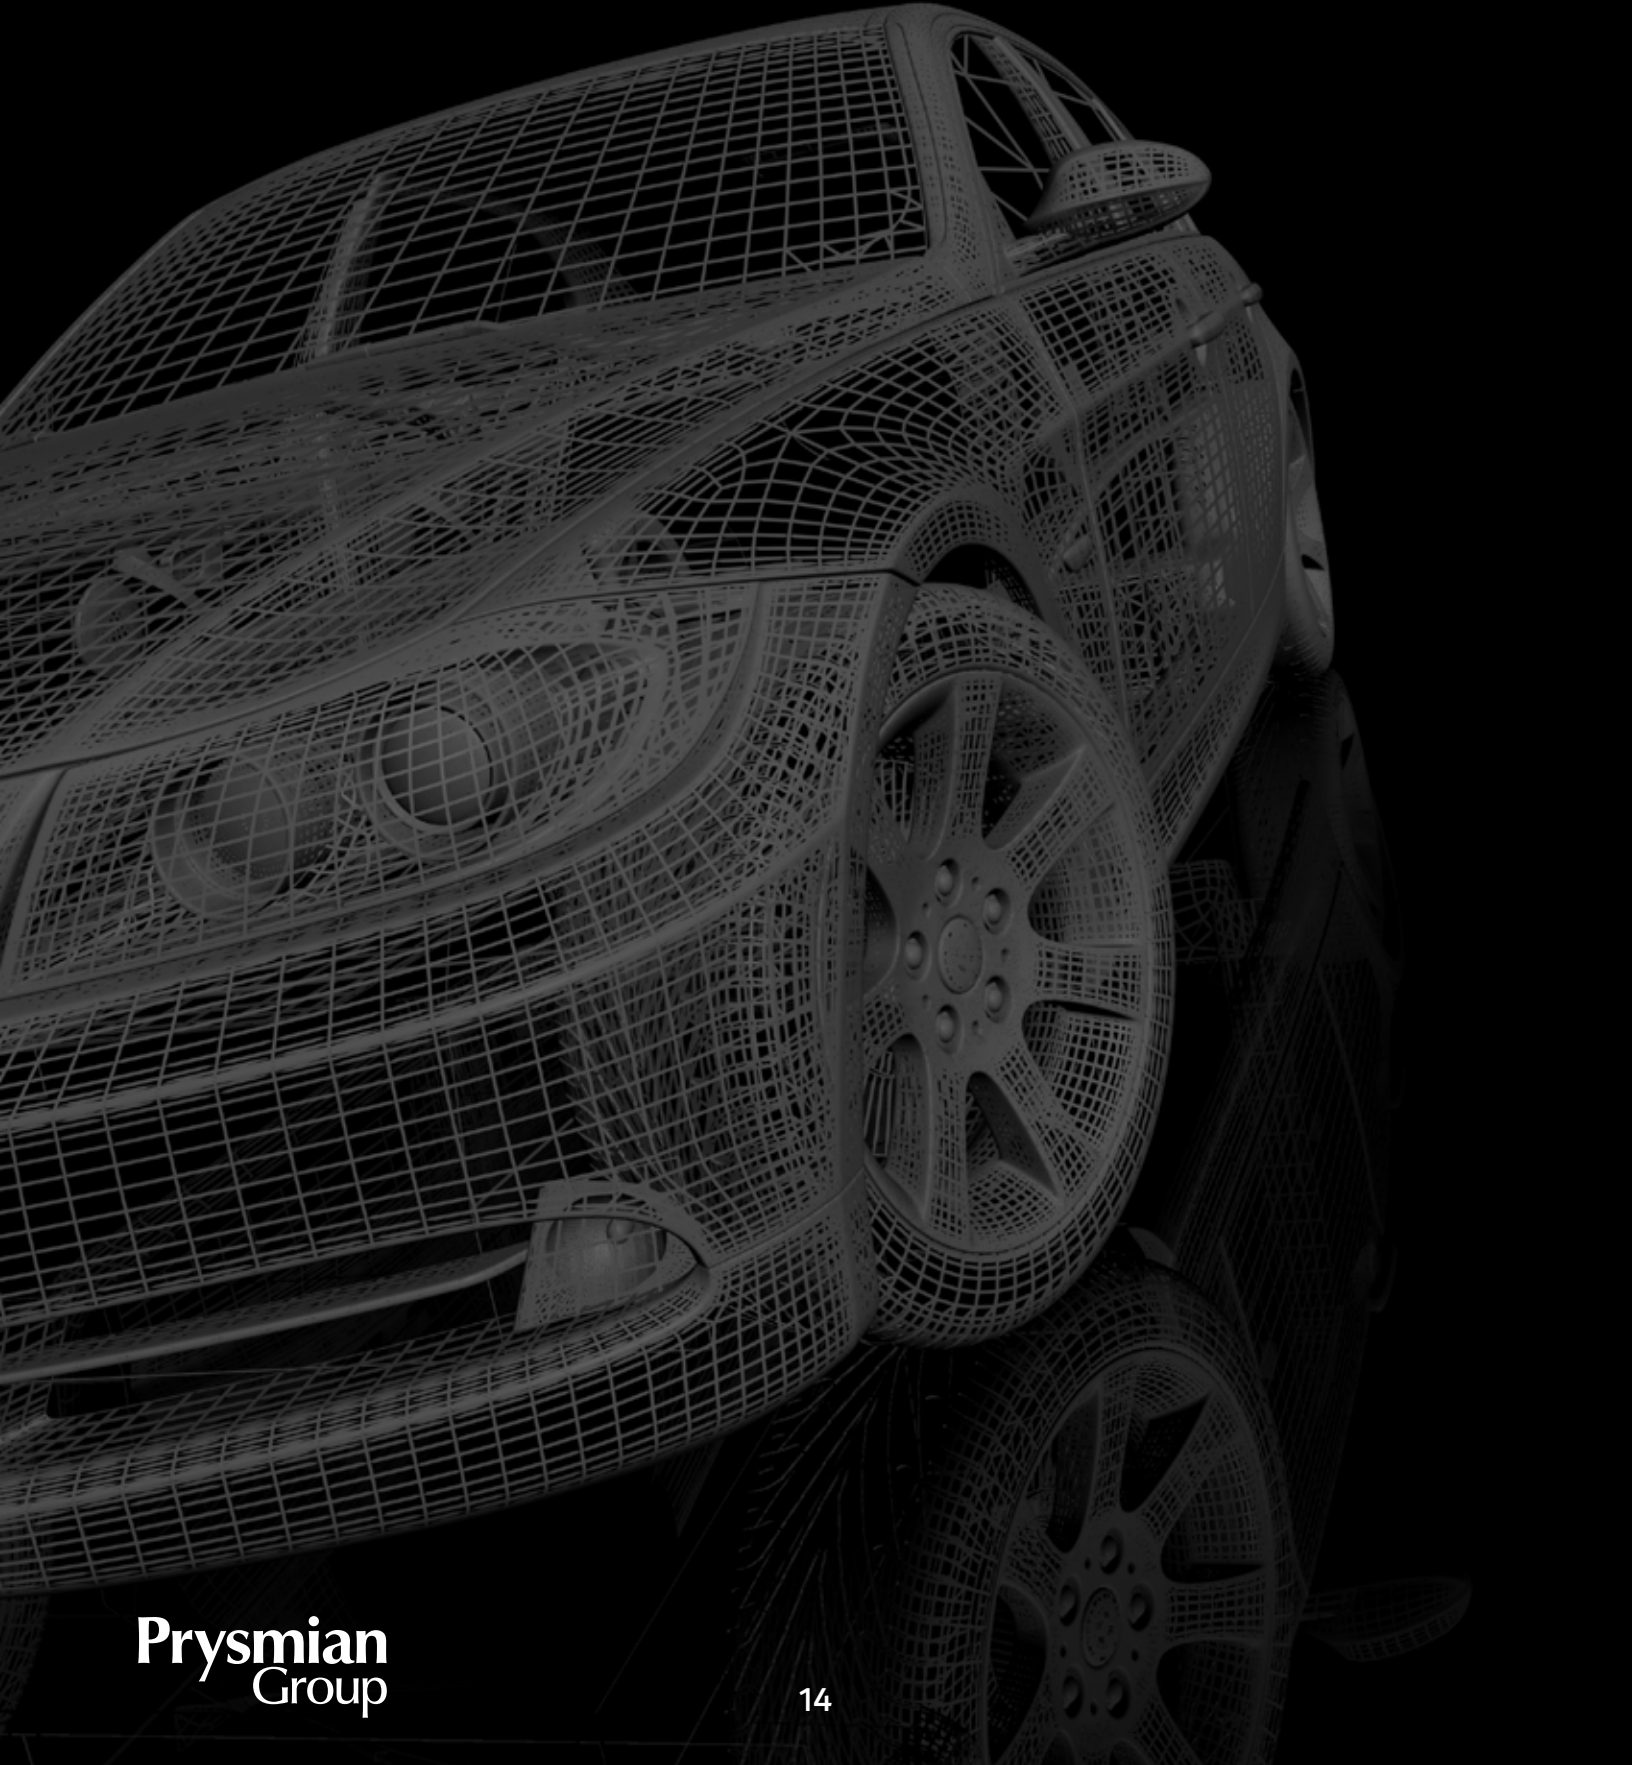

# Product Information Sheet



## 3TSD-HV

- 125°C
- Thin Wall
- Standard Stranding
- Copper Conductor
- High Voltage

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPE (Cross-linked Polyolefin)
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- Stellantis MS.90034/05
- GMW15626
- ISO 19642-05

### Applications

- Low tension cables for -40°C to 125°C
- Nominal system voltage up to 600 V AC or 900 V DC
- Temperature Class 3: -40°C to 125°C

### Product Options

#### Colors:

- Red or Black. Others available upon request

#### Packaging Options:

- Drums, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5% ≥ 50 strands	mm	mΩ/m	mm	mm	mm
0.35	7	0.26	54.4	0.20	1.20	1.40
0.5	19	0.19	37.1	0.22	1.40	1.60
0.75	19	0.24	24.7	0.24	1.70	1.90
1	19	0.27	18.5	0.24	1.90	2.10
1.5	19	0.33	12.7	0.24	2.20	3.40
2	19	0.38	9.42	0.28	2.50	2.80
2.5	37	0.30	7.60	0.28	2.70	3.00
3	44	0.31	6.15	0.32	3.10	3.40
4	56	0.31	4.71	0.32	3.40	3.70
5	70	0.31	3.94	0.32	3.90	4.20
6	84	0.31	3.14	0.32	4.00	4.30

Rev 0 (2022-07-06)

Written by: FClayton

Prestolite Wire Engineering  
 Prysmian Group Automotive  
 Please note: Data subject to change without notice.  
 Contact your Customer Service Representative for any updates.

# Product Information Sheet



## 3TSD-HV

- 125°C
- Thin Wall
- Standard Stranding
- Copper Conductor
- High Voltage

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPE (Cross-linked Polyolefin)
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- Stellantis MS.90034/05
- GMW15626
- ISO 19642-05

### Applications

- Low tension cables for -40°C to 125°C
- Nominal system voltage up to 1000 V AC or 1500 V DC
- Temperature Class 3: -40°C to 125°C

### Product Options

#### Colors:

- Red or Black. Others available upon request

#### Packaging Options:

- Drums, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5% ≥ 50 strands	mm	mΩ/m	mm	mm	mm
1	19	0.27	18.5	0.24	1.90	2.10
1.5	19	0.33	12.7	0.24	2.20	3.40
2	19	0.38	9.42	0.28	2.50	2.80
2.5	37	0.30	7.60	0.28	2.70	3.00
3	44	0.31	6.15	0.32	3.10	3.40
4	56	0.31	4.71	0.32	3.40	3.70
5	70	0.31	3.94	0.32	3.90	4.20
6	84	0.31	3.14	0.32	4.00	4.30

Rev 0 (2022-07-06)

Written by: FClayton



# Product Information Sheet



## 3TFD-HV

- 125°C
- Thin Wall
- Flexible Stranding
- Copper Conductor
- High Voltage

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPE (Cross-linked Polyolefin)
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- Stellantis MS.90034/05
- GMW15626
- ISO 19642-05

### Applications

- Low tension cables for -40°C to 125°C
- Nominal system voltage up to 600 V AC or 900 V DC
- Temperature Class 3: -40°C to 125°C

### Product Options

#### Colors:

- Red or Black. Others available upon request

#### Packaging Options:

- Drums, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5% ≥ 50 strands	mm	mΩ/m	mm	mm	mm
0.35	19	0.16	54.4	0.20	1.20	1.40
0.5	37	0.14	37.1	0.22	1.40	1.60
0.75	38	0.16	24.7	0.24	1.70	1.90
1	54	0.16	18.5	0.24	1.90	2.10
1.5	76	0.16	12.7	0.24	2.20	3.40
2	105	0.16	9.42	0.28	2.50	2.80
2.5	140	0.16	7.60	0.28	2.70	3.00
3	160	0.16	6.15	0.32	3.10	3.40
4	224	0.16	4.71	0.32	3.40	3.70
5	250	0.16	3.94	0.32	3.90	4.20
6	189	0.21	3.14	0.32	4.00	4.30

Rev 0 (2022-07-06)

Written by: FClayton

Prestolite Wire Engineering  
 Prysmian Group Automotive  
 Please note: Data subject to change without notice.  
 Contact your Customer Service Representative for any updates.

# Product Information Sheet



## 3TFD-HV

- 125°C
- Thin Wall
- Flexible Stranding
- Copper Conductor
- High Voltage

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPE (Cross-linked Polyolefin)
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- Stellantis MS.90034/05
- GMW15626
- ISO 19642-05

### Applications

- Low tension cables for -40°C to 125°C
- Nominal system voltage up to 1000 V AC or 1500 V DC
- Temperature Class 3: -40°C to 125°C

### Product Options

#### Colors:

- Red or Black. Others available upon request

#### Packaging Options:

- Drums, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5% ≥ 50 strands	mm	mΩ/m	mm	mm	mm
1	54	0.16	18.5	0.24	1.90	2.10
1.5	76	0.16	12.7	0.24	2.20	3.40
2	105	0.16	9.42	0.28	2.50	2.80
2.5	140	0.16	7.60	0.28	2.70	3.00
3	160	0.16	6.15	0.32	3.10	3.40
4	224	0.16	4.71	0.32	3.40	3.70
5	250	0.16	3.94	0.32	3.90	4.20
6	189	0.21	3.14	0.32	4.00	4.30

Rev 0 (2022-07-06)

Written by: FClayton

# Product Information Sheet



## Battery Cable

- 125°C
- Thin Wall
- Standard Stranding
- Flexible Insulation with Bare Copper Conductors
- High Voltage

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPO (EPDM)
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- Stellantis MS.90034/05
- GMW15626
- ISO 19642-05

### Applications

- Low tension cables for -40°C to 125°C
- Nominal system voltage up to 600 V AC or 900 V DC and 1000 V AC or 1500 V DC
- Temperature Class 3: -40°C to 125°C

### Product Options

#### Colors:

- Orange

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	116	0.31	2.38	0.32	4.60	5.00
10	144	0.31	1.82	0.48	5.30	6.00
12	174	0.31	1.52	0.48	5.80	6.50
16	228	0.31	1.16	0.52	6.40	7.20
20	276	0.31	0.955	0.52	7.00	7.80
25	355	0.31	0.743	0.52	7.90	8.70
30	408	0.31	0.647	0.64	8.70	9.60
35	501	0.31	0.527	0.64	9.40	10.40
40	558	0.31	0.473	0.71	10.00	11.10
50	717	0.31	0.368	0.71	11.00	12.20
60	838	0.31	0.315	0.80	12.00	13.30
70	1019	0.31	0.259	0.80	13.00	14.40
85	1197	0.31	0.219	0.90	14.40	15.80
95	1347	0.31	0.196	0.90	15.30	16.70

Rev 0 (2022-07-06)

Written by: FClayton

Prestolite Wire Engineering  
 Prysmian Group Automotive  
 Please note: Data subject to change without notice.  
 Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 125°C
- Thin Wall
- Flexible Stranding
- Flexible Insulation with Bare Copper Conductors
- High Voltage

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPO (EPDM)
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- Stellantis MS.90034/05
- GMW15626
- ISO 19642-05

### Applications

- Low tension cables for -40°C to 125°C
- Nominal system voltage up to 600 V AC or 900 V DC and 1000 V AC or 1500 V DC
- Temperature Class 3: -40°C to 125°C

### Product Options

#### Colors:

- Orange

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	240	0.21	2.38	0.32	4.60	5.00
10	320	0.21	1.82	0.48	5.30	6.00
12	380	0.21	1.52	0.48	5.80	6.50
16	512	0.21	1.16	0.52	6.40	7.20
20	610	0.21	0.955	0.52	7.00	7.80
25	790	0.21	0.743	0.52	7.90	8.70
30	903	0.21	0.647	0.64	8.70	9.60
35	1102	0.21	0.527	0.64	9.40	10.40
40	1235	0.21	0.473	0.71	10.00	11.10
50	1600	0.21	0.368	0.71	11.00	12.20
60	1841	0.21	0.315	0.80	12.00	13.30
70	2147	0.21	0.259	0.80	13.00	14.40
85	2660	0.21	0.219	0.90	14.40	15.80
95	3000	0.21	0.196	0.90	15.30	16.70

Rev 1 (2022-08-11)

Written by: FClayton

# Product Information Sheet



## Battery Cable

- 125°C
- Thick Wall
- Standard Conductor
- Flexible Insulation with Bare Copper Conductors
- High Voltage

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPO (EPDM)
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- Stellantis MS.90034/05
- GMW15626
- ISO 19642-05

### Applications

- Low tension cables for -40°C to 125°C
- Nominal system voltage up to 600 V AC or 900 V DC and 1000 V AC or 1500 V DC
- Temperature Class 3: -40°C to 125°C

### Product Options

#### Colors:

- Orange

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Maximum Conductor Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mm	mΩ/m	mm	mm	mm
8	116	0.31	4.30	2.38	0.64	5.00	5.90
10	144	0.31	4.50	1.82	0.80	5.90	6.50
12	174	0.31	5.40	1.52	0.80	6.60	7.40
16	228	0.31	6.30	1.16	0.80	7.70	8.30
20	276	0.31	6.90	0.955	0.88	8.10	9.10
25	355	0.31	7.80	0.743	1.04	9.40	10.40
30	408	0.31	8.30	0.647	1.04	9.70	10.90
35	501	0.31	9.00	0.527	1.04	9.60	11.60
40	558	0.31	9.60	0.473	1.12	11.20	12.40
50	717	0.31	10.50	0.368	1.20	11.50	13.50
60	838	0.31	11.60	0.315	1.20	13.40	14.60
70	1019	0.31	12.50	0.259	1.20	13.50	15.50
85	197	0.31	13.60	0.219	1.28	14.80	16.80
95	1347	0.31	14.80	0.196	1.28	16.00	18.00
120*	1726	0.31	16.50	0.153	1.28	17.70	19.70

Rev 0 (2022-07-06)

Written by: FClayton

\* 120mm<sup>2</sup> is the only size available for thick wall application according to the Ford ES-AU5T-1A348-AA

Prestolite Wire Engineering  
Prysmian Group Automotive

Please note: Data subject to change without notice.  
Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 125°C
- Thick Wall
- Flexible Conductor
- Flexible Insulation with Bare Copper Conductors
- High Voltage

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPO (EPDM)
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- Stellantis MS.90034/05
- GMW15626
- ISO 19642-05

### Applications

- Low tension cables for -40°C to 125°C
- Nominal system voltage up to 600 V AC or 900 V DC and 1000 V AC or 1500 V DC
- Temperature Class 3: -40°C to 125°C

### Product Options

#### Colors:

- Orange

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Maximum Conductor Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mm	mΩ/m	mm	mm	mm
8	240	0.21	4.30	2.38	0.64	5.00	5.90
10	320	0.21	4.50	1.82	0.80	5.90	6.50
12	380	0.21	5.40	1.52	0.80	6.60	7.40
16	512	0.21	6.30	1.16	0.80	7.70	8.30
20	610	0.21	6.90	0.955	0.88	8.10	9.10
25	790	0.21	7.80	0.743	1.04	9.40	10.40
30	903	0.21	8.30	0.647	1.04	9.70	10.90
35	1102	0.21	9.00	0.527	1.04	9.60	11.60
40	1235	0.21	9.60	0.473	1.12	11.20	12.40
50	1600	0.21	10.50	0.368	1.20	11.50	13.50
60	1841	0.21	11.60	0.315	1.20	13.40	14.60
70	2147	0.21	12.50	0.259	1.20	13.50	15.50
85	2660	0.21	13.60	0.219	1.28	14.80	16.80
95	3000	0.21	14.80	0.196	1.28	16.00	18.00
120*	3724	0.21	16.50	0.153	1.28	17.70	19.70

Rev 0 (2022-07-06)

Written by: FClayton

\* 120mm<sup>2</sup> is the only size available for thick wall application according to the Ford ES-AU5T-1A348-AA

Prestolite Wire Engineering  
Prismian Group Automotive

Please note: Data subject to change without notice.  
Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 150°C
- Thin Wall
- Flexible Stranding
- Flexible Insulation with Bare Copper Conductors
- High Voltage

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPO (EPDM)
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- Stellantis MS.90034/05
- GMW15626
- ISO 19642-05

### Applications

- Low tension cables for -40°C to 150°C
- Nominal system voltage up to 600 V AC or 900 V DC and 1000 V AC or 1500 V DC
- Temperature Class 4: -40°C to 150°C

### Product Options

#### Colors:

- Orange

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	240	0.21	2.38	0.32	4.60	5.00
10	320	0.21	1.82	0.48	5.30	6.00
12	380	0.21	1.52	0.48	5.80	6.50
16	512	0.21	1.16	0.52	6.40	7.20
20	610	0.21	0.955	0.52	7.00	7.80
25	790	0.21	0.743	0.52	7.90	8.70
30	903	0.21	0.647	0.64	8.70	9.60
35	1102	0.21	0.527	0.64	9.40	10.40
40	1235	0.21	0.473	0.71	10.00	11.10
50	1600	0.21	0.368	0.71	11.00	12.20
60	1841	0.21	0.315	0.80	12.00	13.30
70	2147	0.21	0.259	0.80	13.00	14.40
85	2660	0.21	0.219	0.90	14.40	15.80
95	3000	0.21	0.196	0.90	15.30	16.70

Rev 0 (2022-05-20)

Written by: FClayton

Prestolite Wire Engineering  
 Prysmian Group Automotive  
 Please note: Data subject to change without notice.  
 Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 150°C
- Thick Wall
- Flexible Conductor
- Flexible Insulation with Bare Copper Conductors
- High Voltage

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLPO (EPDM)
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- Stellantis MS.90034/05
- GMW15626
- ISO 19642-05

### Applications

- Low tension cables for -40°C to 150°C
- Nominal system voltage up to 600 V AC or 900 V DC and 1000 V AC or 1500 V DC
- Temperature Class 4: -40°C to 150°C

### Product Options

#### Colors:

- Orange

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Maximum Conductor Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mm	mΩ/m	mm	mm	mm
8	240	0.21	4.30	2.38	0.64	5.00	5.90
10	320	0.21	4.50	1.82	0.80	5.90	6.50
12	380	0.21	5.40	1.52	0.80	6.60	7.40
16	512	0.21	6.30	1.16	0.80	7.70	8.30
20	610	0.21	6.90	0.955	0.88	8.10	9.10
25	790	0.21	7.80	0.743	1.04	9.40	10.40
30	903	0.21	8.30	0.647	1.04	9.70	10.90
35	1102	0.21	9.00	0.527	1.04	9.60	11.60
40	1235	0.21	9.60	0.473	1.12	11.20	12.40
50	1600	0.21	10.50	0.368	1.20	11.50	13.50
60	1841	0.21	11.60	0.315	1.20	13.40	14.60
70	2147	0.21	12.50	0.259	1.20	13.50	15.50
85	2660	0.21	13.60	0.219	1.28	14.80	16.80
95	3000	0.21	14.80	0.196	1.28	16.00	18.00
120*	3724	0.21	16.50	0.153	1.28	17.70	19.70

Rev 0 (2022-05-20)

Written by: FClayton

\* 120mm<sup>2</sup> is the only size available for thick wall application according to the Ford ES-AU5T-1A348-AA

Prestolite Wire Engineering  
Prismian Group Automotive

Please note: Data subject to change without notice.  
Contact your Customer Service Representative for any updates.



# Product Information Sheet



## Battery Cable

- 200°C
- Thin Wall
- Flexible Stranding
- Flexible Insulation with Bare Copper Conductors
- High Voltage

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: Silicone
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- Stellantis MS.90034/05
- GMW15626
- ISO 19642-05

### Applications

- Low tension cables for -40°C to 200°C
- Nominal system voltage up to 600 V AC or 900 V DC and 1000 V AC or 1500 V DC
- Temperature Class 6: -40°C to 200°C

### Product Options

#### Colors:

- Orange

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	240	0.21	2.38	0.32	4.60	5.00
10	320	0.21	1.82	0.48	5.30	6.00
12	380	0.21	1.52	0.48	5.80	6.50
16	512	0.21	1.16	0.52	6.40	7.20
20	610	0.21	0.955	0.52	7.00	7.80
25	790	0.21	0.743	0.52	7.90	8.70
30	903	0.21	0.647	0.64	8.70	9.60
35	1102	0.21	0.527	0.64	9.40	10.40
40	1235	0.21	0.473	0.71	10.00	11.10
50	1600	0.21	0.368	0.71	11.00	12.20
60	1841	0.21	0.315	0.80	12.00	13.30
70	2147	0.21	0.259	0.80	13.00	14.40
85	2660	0.21	0.219	0.90	14.40	15.80
95	3000	0.21	0.196	0.90	15.30	16.70

Rev 0 (2022-05-20)

Written by: FClayton

Prestolite Wire Engineering  
 Prysmian Group Automotive  
 Please note: Data subject to change without notice.  
 Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 200°C
- Thick Wall
- Flexible Conductor
- Flexible Insulation with Bare Copper Conductors
- High Voltage

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: Silicone
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- Stellantis MS.90034/05
- GMW15626
- ISO 19642-05

### Applications

- Low tension cables for -40°C to 200°C
- Nominal system voltage up to 600 V AC or 900 V DC and 1000 V AC or 1500 V DC
- Temperature Class 4: -40°C to 200°C

### Product Options

#### Colors:

- Orange

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Maximum Conductor Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mm	mΩ/m	mm	mm	mm
8	240	0.21	4.30	2.38	0.64	5.00	5.90
10	320	0.21	4.50	1.82	0.80	5.90	6.50
12	380	0.21	5.40	1.52	0.80	6.60	7.40
16	512	0.21	6.30	1.16	0.80	7.70	8.30
20	610	0.21	6.90	0.955	0.88	8.10	9.10
25	790	0.21	7.80	0.743	1.04	9.40	10.40
30	903	0.21	8.30	0.647	1.04	9.70	10.90
35	1102	0.21	9.00	0.527	1.04	9.60	11.60
40	1235	0.21	9.60	0.473	1.12	11.20	12.40
50	1600	0.21	10.50	0.368	1.20	11.50	13.50
60	1841	0.21	11.60	0.315	1.20	13.40	14.60
70	2147	0.21	12.50	0.259	1.20	13.50	15.50
85	2660	0.21	13.60	0.219	1.28	14.80	16.80
95	3000	0.21	14.80	0.196	1.28	16.00	18.00
120*	3724	0.21	16.50	0.153	1.28	17.70	19.70

Rev 0 (2022-05-20)

Written by: FClayton

\* 120mm<sup>2</sup> is the only size available for thick wall application according to the Ford ES-AU5T-1A348-AA

Prestolite Wire Engineering  
Prysmian Group Automotive

Please note: Data subject to change without notice.  
Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 200°C
- Thin Wall
- Flexible Stranding
- Flexible Insulation with Bare Copper Conductors
- High Voltage

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLFE
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- Stellantis MS.90034/05
- GMW15626
- ISO 19642-05

### Applications

- Low tension cables for -40°C to 200°C
- Nominal system voltage up to 600 V AC or 900 V DC and 1000 V AC or 1500 V DC
- Temperature Class 6: -40°C to 200°C

### Product Options

#### Colors:

- Orange

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mΩ/m	mm	mm	mm
8	240	0.21	2.38	0.32	4.60	5.00
10	320	0.21	1.82	0.48	5.30	6.00
12	380	0.21	1.52	0.48	5.80	6.50
16	512	0.21	1.16	0.52	6.40	7.20
20	610	0.21	0.955	0.52	7.00	7.80
25	790	0.21	0.743	0.52	7.90	8.70
30	903	0.21	0.647	0.64	8.70	9.60
35	1102	0.21	0.527	0.64	9.40	10.40
40	1235	0.21	0.473	0.71	10.00	11.10
50	1600	0.21	0.368	0.71	11.00	12.20
60	1841	0.21	0.315	0.80	12.00	13.30
70	2147	0.21	0.259	0.80	13.00	14.40
85	2660	0.21	0.219	0.90	14.40	15.80
95	3000	0.21	0.196	0.90	15.30	16.70

Rev 0 (2022-05-20)

Written by: FClayton

Prestolite Wire Engineering  
 Prysmian Group Automotive  
 Please note: Data subject to change without notice.  
 Contact your Customer Service Representative for any updates.

# Product Information Sheet



## Battery Cable

- 200°C
- Thick Wall
- Flexible Conductor
- Flexible Insulation with Bare Copper Conductors
- High Voltage

### Features

- Copper Conductors per ASTM B3 and ASTM B33
- Insulation Material: XLFE
- RoHS Compliant

### Compliance

- Ford ES-AU5T-1A348-AA
- Ford ES-JU5T-1A348-AA
- Stellantis MS.90034/05
- GMW15626
- ISO 19642-05

### Applications

- Low tension cables for -40°C to 200°C
- Nominal system voltage up to 600 V AC or 900 V DC and 1000 V AC or 1500 V DC
- Temperature Class 4: -40°C to 200°C

### Product Options

#### Colors:

- Orange

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

Conductor Size	Number of Strands	Maximum Strand Diameter	Maximum Conductor Diameter	Conductor Resistance, Maximum	Insulation Thickness, Minimum	Cable OD, Minimum	Cable OD, Maximum
mm <sup>2</sup>	± 5%	mm	mm	mΩ/m	mm	mm	mm
8	240	0.21	4.30	2.38	0.64	5.00	5.90
10	320	0.21	4.50	1.82	0.80	5.90	6.50
12	380	0.21	5.40	1.52	0.80	6.60	7.40
16	512	0.21	6.30	1.16	0.80	7.70	8.30
20	610	0.21	6.90	0.955	0.88	8.10	9.10
25	790	0.21	7.80	0.743	1.04	9.40	10.40
30	903	0.21	8.30	0.647	1.04	9.70	10.90
35	1102	0.21	9.00	0.527	1.04	9.60	11.60
40	1235	0.21	9.60	0.473	1.12	11.20	12.40
50	1600	0.21	10.50	0.368	1.20	11.50	13.50
60	1841	0.21	11.60	0.315	1.20	13.40	14.60
70	2147	0.21	12.50	0.259	1.20	13.50	15.50
85	2660	0.21	13.60	0.219	1.28	14.80	16.80
95	3000	0.21	14.80	0.196	1.28	16.00	18.00
120*	3724	0.21	16.50	0.153	1.28	17.70	19.70

Rev 0 (2022-05-20)

Written by: FClayton

\* 120mm<sup>2</sup> is the only size available for thick wall application according to the Ford ES-AU5T-1A348-AA

Prestolite Wire Engineering  
Prismian Group Automotive

Please note: Data subject to change without notice.  
Contact your Customer Service Representative for any updates.

# Product Information Sheet



## High Voltage Shielded Cable

- 150°C – XLPO (EPDM)
- Single-Core – Thin Wall
- Flexible Stranding
- METRIC – 600 V AC or 900 V DC and 1000 V AC or 1500 V DC

### Features

- Copper Conductors
- Insulation: 150°C XLPO (EPDM) Cable Class D
- Sheath: 150°C XLPO (EPDM) Cable Class D
- RoHS Compliant

### Compliance

- ISO 19642-9
- Stellantis MS.90034/09
- GMW15839
- Ford ES-JU5T-1A348-AA
- Conductors: ISO 19642-5 (Flexible)

### Applications

- Cables used for transportation vehicle systems
- Suitable for use inside the engine compartment
- Temperature range: -40°C to 150°C

### Product Options

#### Colors:

- Orange. Others available upon request

#### Braiding:


- Tinned Copper

#### Screening:

- Aluminum-backed PET foil in contact with braid

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

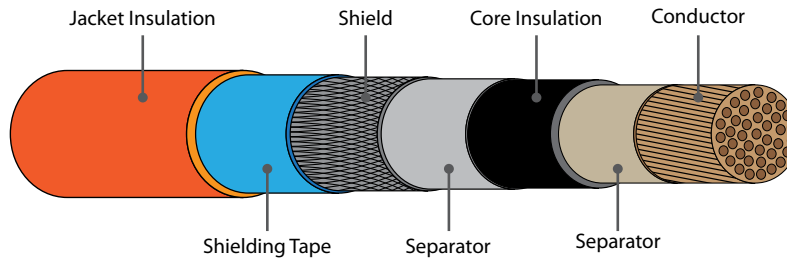

Cable size (mm2)	Cond. Dia Max (mm)	# of Strands Flex. Cond.	Max. Cond. Resist. mΩm at 20°C	CSA mm <sup>2</sup> Max.	CSA mm <sup>2</sup> Min.	Core				Screen		Outer Jacket				Part #
						OD Min (mm)	OD Max (mm)	Insul. Thickness Nom. (mm)	Insul. Thickness Min. (mm)	Cond. (mm)	Max (mm)	Nom. Wall Thickness (mm)	Min. Wall Thickness (mm)	Min Cable OD (mm)	Max Cable OD (mm)	
35.0	9.0	1102	0.527	35.3	32.7	9.40	10.40	0.80	0.64	0.21	11.2	1.00	0.80	12.6	13.2	TBD
40.0	9.6	1235	0.473	39.4	36.5	10.0	11.10	0.90	0.71	0.21	11.9	1.00	0.80	13.3	13.9	TBD
50.0	10.5	1600	0.368	50.6	46.9	11.0	12.20	0.90	0.71	0.21	13.0	1.10	0.88	14.6	15.2	TBD
60.0	11.6	1841	0.315	59.1	54.7	12.0	13.30	1.00	0.80	0.21	14.1	1.10	0.88	15.5	16.3	TBD
70.0	12.5	2147	0.259	71.9	66.6	13.0	14.40	1.00	0.80	0.21	15.2	1.10	0.88	16.6	17.4	TBD
85.0	13.6	2660	0.219	85.0	78.7	14.40	15.80	1.13	0.90	0.26	16.8	1.10	0.88	18.2	19.0	TBD
95.0	14.8	3000	0.196	95.0	88.0	15.30	16.70	1.13	0.90	0.26	17.7	1.10	0.88	19.1	19.9	TBD

Rev 0 (2022-06-20)

Written by: KMorrow

Prestolite Wire Engineering  
Prysmian Group Automotive

Please note: Data subject to change without notice.  
Contact your Customer Service Representative for any updates.

# Product Information Sheet



## High Voltage Shielded Cable

- 200°C – Silicone
- Single-Core – Thin Wall
- Flexible Stranding
- METRIC – 600 V AC or 900 V DC and 1000 V AC or 1500 V DC

### Features

- Copper Conductors
- Insulation: 200°C Silicone Cable Class F
- Sheath: 200°C Silicone Cable Class F
- RoHS Compliant

### Compliance

- ISO 19642-9
- Stellantis MS.90034/09
- GMW15839
- Ford ES-JU5T-1A348-AA
- Conductors: ISO 19642-5 (Flexible)

### Applications

- Cables used for transportation vehicle systems
- Suitable for use inside the engine compartment
- Temperature range: -40°C to 200°C

### Product Options

#### Colors:

- Orange. Others available upon request

#### Braiding:


- Tinned Copper

#### Screening:

- Aluminum-backed PET foil in contact with braid

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

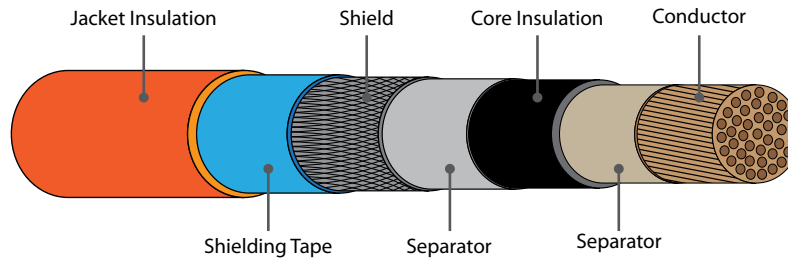

Cable size (mm <sup>2</sup> )	Cond. Dia Max (mm)	# of Strands Flex. Cond.	Max. Cond. Resist. mΩm at 20°C	CSA mm <sup>2</sup> Max.	CSA mm <sup>2</sup> Min.	Core				Screen		Outer Jacket				Part #
						OD Min (mm)	OD Max (mm)	Insul. Thickness Nom. (mm)	Insul. Thickness Min. (mm)	Cond. (mm)	Max (mm)	Nom. Wall Thickness (mm)	Min. Wall Thickness (mm)	Min Cable OD (mm)	Max Cable OD (mm)	
35.0	9.0	1102	0.527	35.3	32.7	9.40	10.40	0.80	0.64	0.21	11.2	1.00	0.80	12.6	13.2	TBD
40.0	9.6	1235	0.473	39.4	36.5	10.0	11.10	0.90	0.71	0.21	11.9	1.00	0.80	13.3	13.9	TBD
50.0	10.5	1600	0.368	50.6	46.9	11.0	12.20	0.90	0.71	0.21	13.0	1.10	0.88	14.6	15.2	TBD
60.0	11.6	1841	0.315	59.1	54.7	12.0	13.30	1.00	0.80	0.21	14.1	1.10	0.88	15.5	16.3	TBD
70.0	12.5	2147	0.259	71.9	66.6	13.0	14.40	1.00	0.80	0.21	15.2	1.10	0.88	16.6	17.4	TBD
85.0	13.6	2660	0.219	85.0	78.7	14.40	15.80	1.13	0.90	0.26	16.8	1.10	0.88	18.2	19.0	TBD
95.0	14.8	3000	0.196	95.0	88.0	15.30	16.70	1.13	0.90	0.26	17.7	1.10	0.88	19.1	19.9	TBD

Rev 0 (2022-06-20)

Written by: KMorrow

Prestolite Wire Engineering  
Prismian Group Automotive

Please note: Data subject to change without notice.  
Contact your Customer Service Representative for any updates.

# Product Information Sheet



## High Voltage Shielded Cable

- 200°C – XLFE
- Single-Core – Thin Wall
- Flexible Stranding
- METRIC – 600 V AC or 900 V DC and 1000 V AC or 1500 V DC

### Features

- Copper Conductors
- Insulation: 200°C XLFE Cable Class F
- Sheath: 200°C XLFE Cable Class F
- RoHS Compliant

### Compliance

- ISO 19642-9
- Stellantis MS.90034/09
- GMW15839
- Ford ES-JU5T-1A348-AA
- Conductors: ISO 19642-5 (Flexible)

### Applications

- Cables used for transportation vehicle systems
- Suitable for use inside the engine compartment
- Temperature range: -40°C to 200°C

### Product Options

#### Colors:

- Orange. Others available upon request

#### Braiding:


- Tinned Copper

#### Screening:

- Aluminum-backed PET foil in contact with braid

#### Packaging Options:

- Reels, various sizes and disposal or recyclable

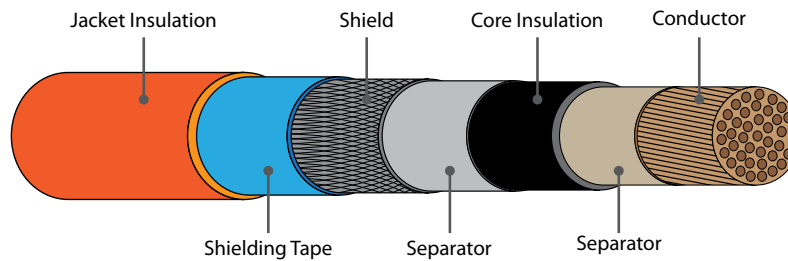

Cable size (mm2)	Cond. Dia Max (mm)	# of Strands Flex. Cond.	Max. Cond. Resist. mΩm at 20°C	CSA mm <sup>2</sup> Max.	CSA mm <sup>2</sup> Min.	Core				Screen		Outer Jacket				Part #
						OD Min (mm)	OD Max (mm)	Insul. Thickness Nom. (mm)	Insul. Thickness Min. (mm)	Cond. (mm)	Max (mm)	Nom. Wall Thickness (mm)	Min. Wall Thickness (mm)	Min Cable OD (mm)	Max Cable OD (mm)	
35.0	9.0	1102	0.527	35.3	32.7	9.40	10.40	0.80	0.64	0.21	11.2	1.00	0.80	12.6	13.2	TBD
40.0	9.6	1235	0.473	39.4	36.5	10.0	11.10	0.90	0.71	0.21	11.9	1.00	0.80	13.3	13.9	TBD
50.0	10.5	1600	0.368	50.6	46.9	11.0	12.20	0.90	0.71	0.21	13.0	1.10	0.88	14.6	15.2	TBD
60.0	11.6	1841	0.315	59.1	54.7	12.0	13.30	1.00	0.80	0.21	14.1	1.10	0.88	15.5	16.3	TBD
70.0	12.5	2147	0.259	71.9	66.6	13.0	14.40	1.00	0.80	0.21	15.2	1.10	0.88	16.6	17.4	TBD
85.0	13.6	2660	0.219	85.0	78.7	14.40	15.80	1.13	0.90	0.26	16.8	1.10	0.88	18.2	19.0	TBD
95.0	14.8	3000	0.196	95.0	88.0	15.30	16.70	1.13	0.90	0.26	17.7	1.10	0.88	19.1	19.9	TBD

Rev 0 (2022-06-20)

Written by: KMorrow

Prestolite Wire Engineering  
Prysmian Group Automotive

Please note: Data subject to change without notice.  
Contact your Customer Service Representative for any updates.



Prysmian Group, is the corporate brand which includes the three distinct commercial brands of Prysmian, Draka and General Cable – is a world leader in the energy and telecom cable systems industry. With over 140 years of experience, sales of over €11 billion, 29,000 employees in over 50 countries and 112 plants, the Group is strongly positioned in high-tech markets and offers the widest possible range of products, services, technologies and know-how.



**PRYSMIAN GROUP**

4 Tesseneer Drive, Highland Heights, KY 41076  
+1-859-572-8000 / [na.prysmiangroup.com](http://na.prysmiangroup.com)

AUT-0001-0822

Follow us:

