

# Carol® Double Jacket Drill Cord

90°C, 600 Volt, MSHA Approved Remote Control & Drill Cord



**Product Construction:**

**Conductors:**

- 14 through 10 AWG fully annealed stranded bare copper
- ASTM B3/B174

**Insulation**


- Premium-grade, color-coded 90°C EPDM
- Color code: See chart below

**Jacket**

- 90°C, black, CPE or neoprene
- Temperature range: -40°C to +90°C
- An open polyester braid reinforcement is applied between layers for mechanical strength

**Jacket Marking**

- CPE jacket - CAROL (SIZE & NO. OF CONDS.) DOUBLE JACKET REMOTE CONTROL AND DRILL CORD 600 V 90°C P-07-KA110003-MSHA MADE IN USA
- Neoprene jacket - CAROL (SIZE & NO. OF CONDS.) NEOPRENE DOUBLE JACKET REMOTE CONTROL AND DRILL CORD 600 V 90°C P-07-KA110006-MSHA MADE IN USA

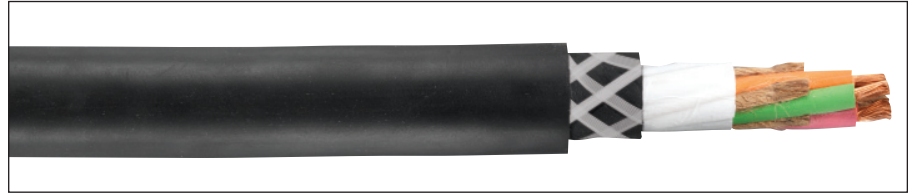

**Applications:**

- Industrial and light- to medium-duty mining applications
- Heavy-duty service as power supply cable
- AC systems (grounded and ungrounded)
- Heavy-duty and long service life applications
- Mobile and portable electrical equipment
- Motor and battery leads
- Wet or dry locations in underground mines in accordance with Schedule 26 of the U.S. Bureau of Mines
- 3-conductor cables – use on AC systems where no grounding is required or on DC systems with one conductor for grounding
- 4-conductor cables – use on two- or three-phase AC systems with one conductor used for grounding
- 5-conductor cables – use in applications where separating the system neutral from the frame ground is required

**Features:**

- Withstands severe environmental conditions
- Indent-printed for easy identification
- Withstands exposure to oil, acids, alkalis, heat, moisture and most chemicals
- Flexible stranding
- Excellent impact, crush and tear resistance
- Sunlight-resistant
- Reinforced jacket for increased durability
- TRU-Mark® sequential footage marking

**Industry Approvals:**

- RoHS Compliant
- Passes MSHA Flame Test
- Additional rating available upon request
- Other sizes and numbers of conductors available upon request

**Applicable Standards:**

- ICEA S-75-381

**Packaging:**

- Lengths cut to order

**COLOR CODE CHART**

NO. OF CONDUCTORS	COLOR**
2	Black, White
3	Black, White, Green
4	Black, White, Red, Green
5	Black, White, Red, Green, Orange
6	Black, White, Red, Green, Orange, Blue

\*\* Green conductor for grounding only.

CATALOG NUMBER	NO. OF COND.	AWG SIZE	COND. STRAND	NOMINAL COND. O.D.		NOMINAL INS. THICKNESS		NOMINAL O.D.		CURRENT AMPS <sup>(1)</sup>	APPROX. NET WT. LBS/M <sup>(5)</sup>
				INCHES	mm	INCHES	mm	INCHES	mm		

**CPE JACKET**

02861	2	14	41/30	0.072	1.96	0.045	1.14	0.640	16.26	18	210
02862	3	14	41/30	0.072	1.96	0.045	1.14	0.670	17.02	18	240
02868	4	14	41/30	0.072	1.96	0.045	1.14	0.715	18.16	15	285
02835	5	14	41/30	0.072	1.96	0.045	1.14	0.785	19.94	12	345
02845	5	12	65/30	0.096	2.44	0.045	1.14	0.840	21.34	16	405
02806	6	12	65/30	0.096	2.44	0.045	1.14	0.890	22.61	16	470
02855	5	10	104/30	0.117	2.97	0.045	1.14	0.895	22.73	20	495

**NEOPRENE JACKET**

02961*	2	14	41/30	0.072	1.96	0.045	1.14	0.640	16.26	18	220
02962*	3	14	41/30	0.072	1.96	0.045	1.14	0.670	17.02	18	260
02968*	4	14	41/30	0.072	1.96	0.045	1.14	0.715	18.16	15	300
02935*	5	14	41/30	0.072	1.96	0.045	1.14	0.785	19.94	12	365
02945*	5	12	65/30	0.096	2.44	0.045	1.14	0.840	21.34	16	425
02906*	6	12	65/30	0.096	2.44	0.045	1.14	0.890	22.61	16	490
02955*	5	10	104/30	0.117	2.97	0.045	1.14	0.895	22.73	20	515

\* Non-stock item; minimum quantity purchase required.

<sup>(1)</sup> Ampacities based on 90°C conductor and 30°C ambient temperature per NEC Table 400.5(A)(1) of the National Electrical Code®.

<sup>(5)</sup> Actual shipping weight may vary.